

AQ1200 MFT-OTDR

MULTI FIELD TESTER OTDR

All-in-One
handheld optical fiber network test tool



QUALITY ■ INNOVATION ■ FORESIGHT

Multifunctional Handheld OTDR

Offering Powerful Test Features & Excellent Operability

MULTI FIELD TESTER MFT-OTDR AQ1200

Functions for field testing are integrated into a compact box

The AQ1200 Multi-Field-Tester OTDR is a compact and lightweight handheld OTDR with functionality optimized for the installation and maintenance of optical fiber cables and equipped with functions and operability that make the field testing easier. The AQ1200 offers three models, each of which has unique wavelength(s) based on their application. It is the test solution that improves work efficiency and quality.

OTDR

Wavelength: SM 1310/1550 nm (AQ1200A)
SM 1625 nm (AQ1200B)
SM 1650 nm (AQ1200C)
Event Dead Zone: ≤ 0.8m

Light Source & Optical Powermeter (Option)

Optical power meter and a continuous wave optical output functions, which can work independently. The optical power meter can be chosen from three types in accordance with your application.

Auto Loss Test (Option)

Measure the transmission loss efficiently by controlling the light source and the optical power meter automatically.

Multicore Loss Testing (Option)

Measure the loss of a multicore fiber efficiently by linking up with another unit located at the other end of network.

Visible Light Source (Option)

For visually identifying fiber under test and locating a break point within the near-end dead zone.

Fault Locator

Find a location where the fiber is broken easily and quickly.

PING Test (Option)

Test network connections sending PING through the optional LAN interface without an PC.

Video Fiber Inspection Probe

Inspect the quality of the fiber end.

Compact and Light-weight, yet Tough

- 217.5 (W) × 157 (H) × 74 (D) mm, and weigh only 1 kg
- Robust, dust-proof and drip-proof design

Product Lineup

AQ1200A

1310/1550 nm

Standard model with the same wavelengths used for communication services. Applicable to installation and maintenance.

AQ1200B

1625 nm



Models with a wavelength dedicated for maintenance. Those models use a different wavelength from the wavelengths of communication services to minimize the influence of measurements on the service and has a built-in cut filter to reduce the influence of the service signal on the measurement, so that they can perform accurate measurements in the presence of the communication service signals.

AQ1200C

1650 nm

* : Please make sure that the measurement signal does not affect the communication services before use, by implementing a measurement wavelength cut filter in the line under test or otherwise.

• AQ1200B, AQ1200C test configuration

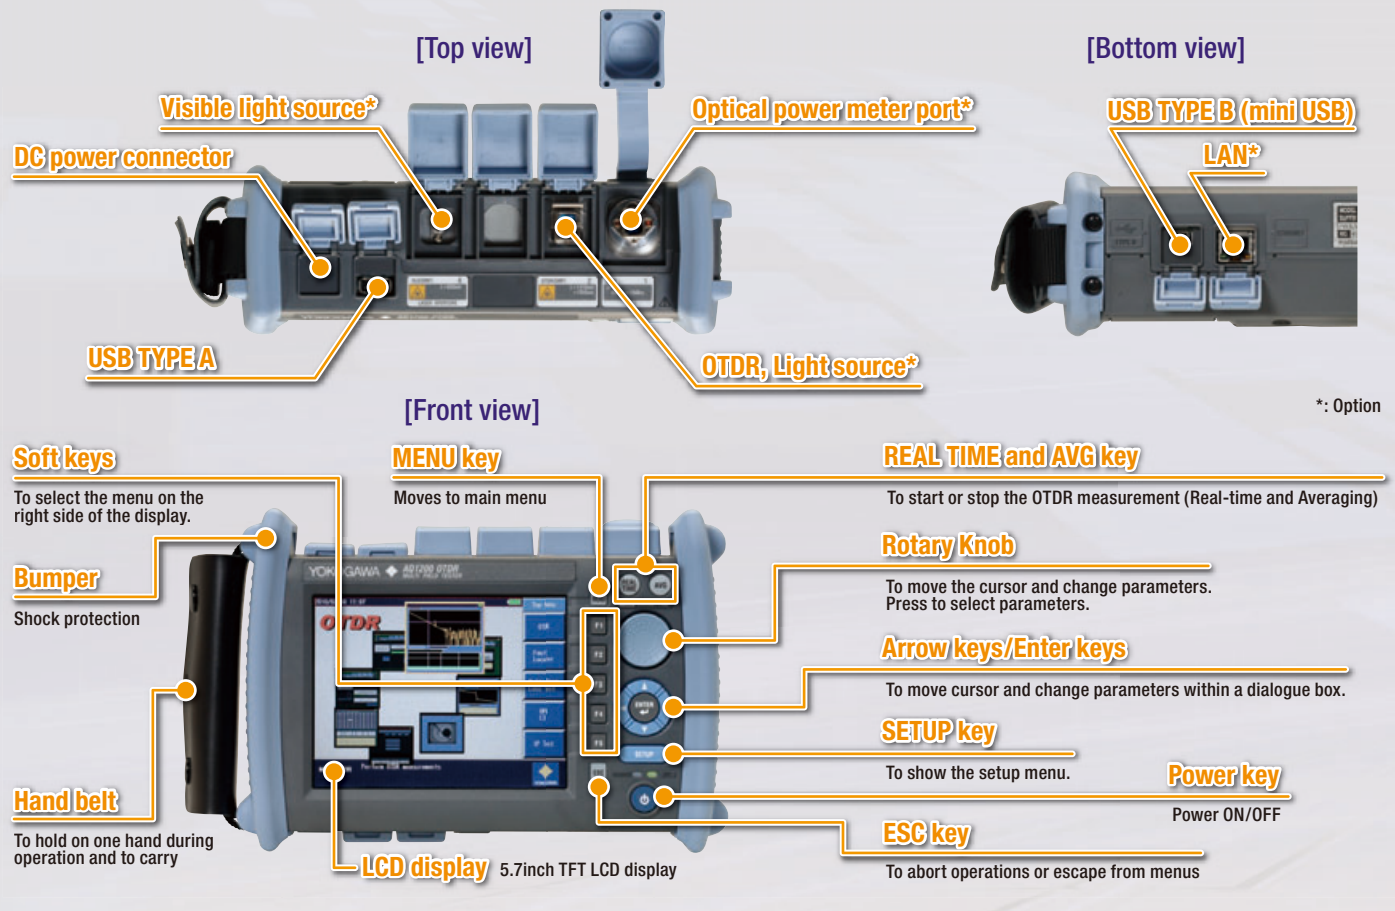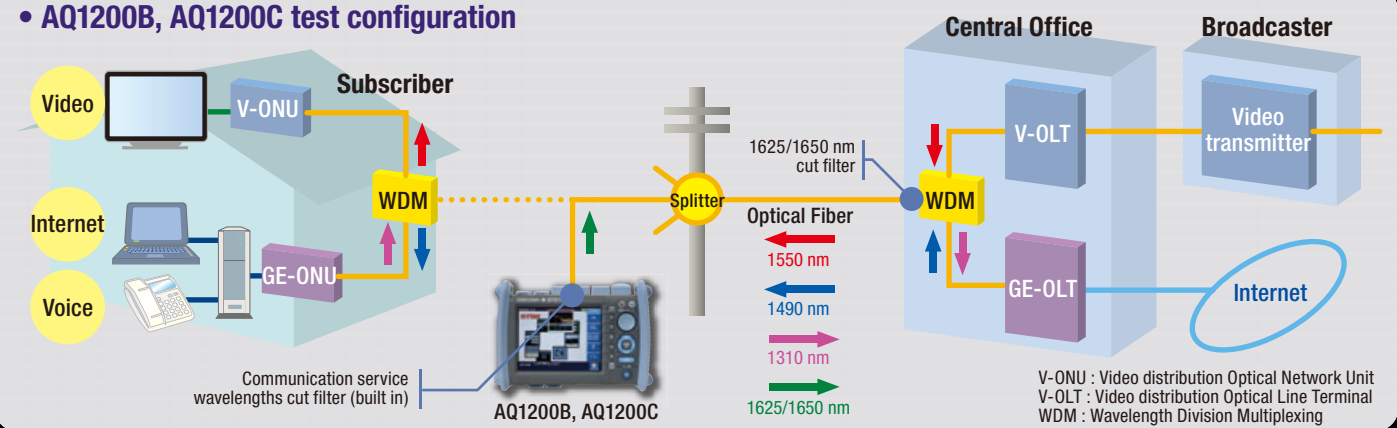

PON Measurement Capability


In Passive Optical Network (PON) System used in FTTH (Fiber To The Home) it is important to quickly and correctly find a fault in the drop cable that is installed after the splitter.

The AQ1200 MFT OTDR's PON measurement mode (*) is a mode optimized for the measurement of PON with a high-port-count optical splitter and can ensure a quality waveform even if there is a big loss of optical splitter in the line.


With the short dead zone, the AQ1200 can separate connectors placed as closely as 0.8 m in FTTH, house or office wiring.

* : The standard feature for AQ1200B and AQ1200C and optional for AQ1200A.


• Example of measurement over a 32 port splitter (AQ1200B)

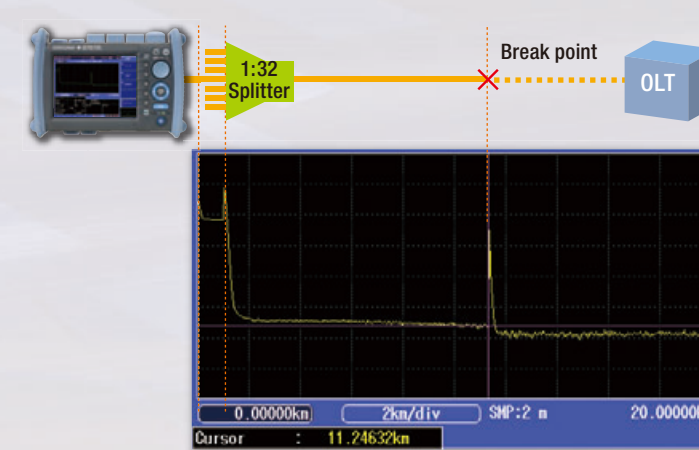

• Event dead zone 0.8 m

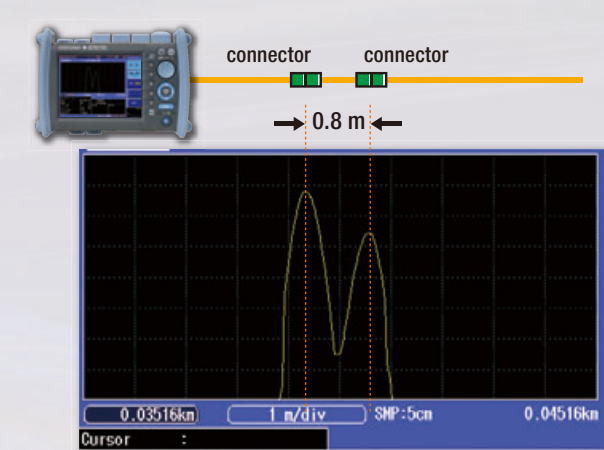

Light Source & Optical Powermeter

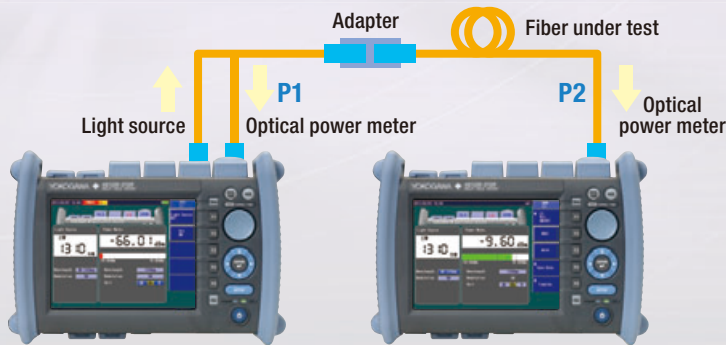

Manual Loss test using light source & optical powermeter^{*1,*2}

After adjusting the optical output power (P1) at the end of launch fiber, measure the output power of fiber under test (P2).


$$\text{Total fiber loss} = P1 - P2 \text{ (dB)}$$

High power measurement^{*2}

Allow to measure the high power output of optical amplifier, which is used for video services, such as CATV, and long distance transmission.

^{*1} : /SLT option is required to use this function. ^{*2} : /HLT option is required to use this function.

Auto Loss Test^{*}

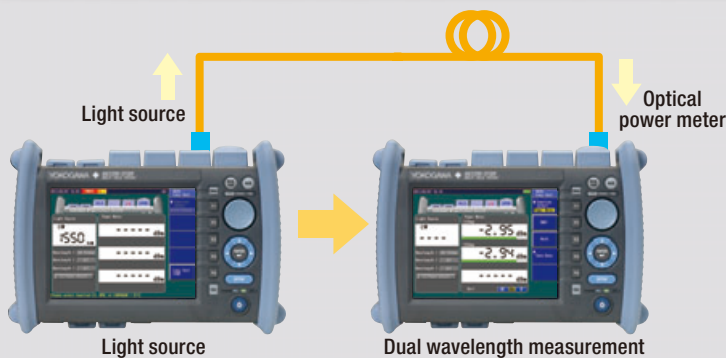

Loss measurement with LS & OPM interlock


AQ1200's light source can transmit wavelength information, so that AQ1200's optical powermeter can make measurements at a right wavelength at the other end. Moreover, the AQ1200A's light source and optical powermeter can switch between two wavelengths (1310 and 1550 nm) automatically; therefore, the optical powermeter can make measurements at right wavelengths, changing the wavelength along with the light source.

Measurement result storage and report output

Measurement results can be saved in the internal storage or external USB storage media, and the measurement report can be generated in CSV format.

^{*} : /SLT or /HLT option is required to use this function.


Multicore Loss Test^{*}

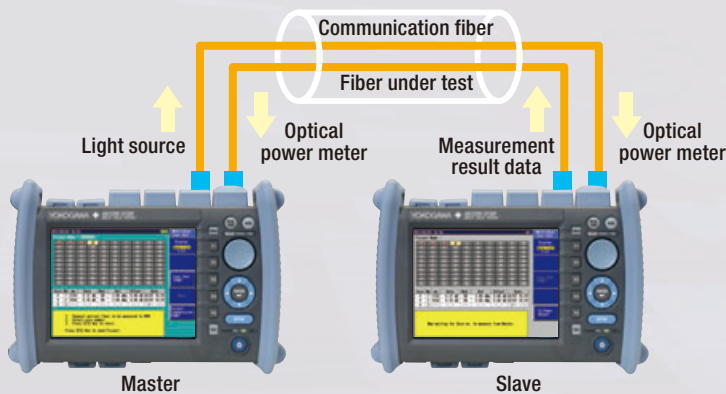

Work as Master & Slave using the communication fiber

The master unit can share the project information such as the core number table and measurement conditions with the slave unit by sending them through the communication fiber in the cable under test.

^{*} : /SLT or /HLT option is required to use this function.

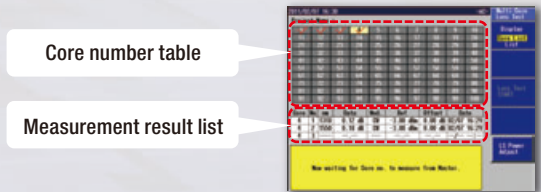

Multicore measurement result screen


PON Optical Powermeter^{*}

Simultaneous 1490 & 1550 nm measurement

The PON power meter can measure the optical power both at 1490 nm and at 1550 nm simultaneously by separating those wavelengths.


Suitable tool for measuring the optical power of OLT and V-OLT.

^{*} : /PPM option is required to use this function.

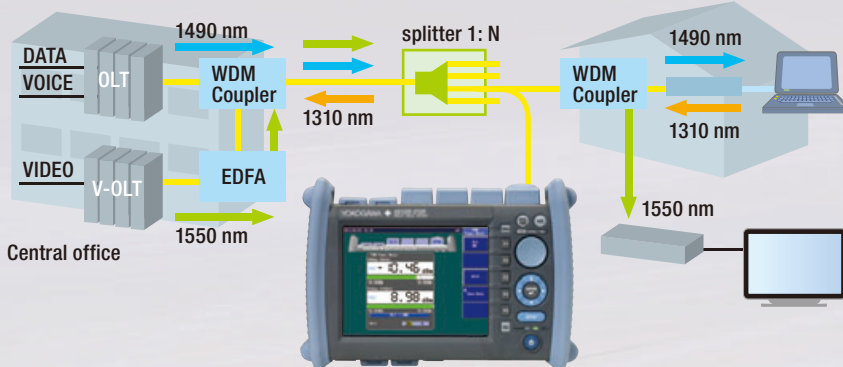

PON optical powermeter screen

Visible Light Source*

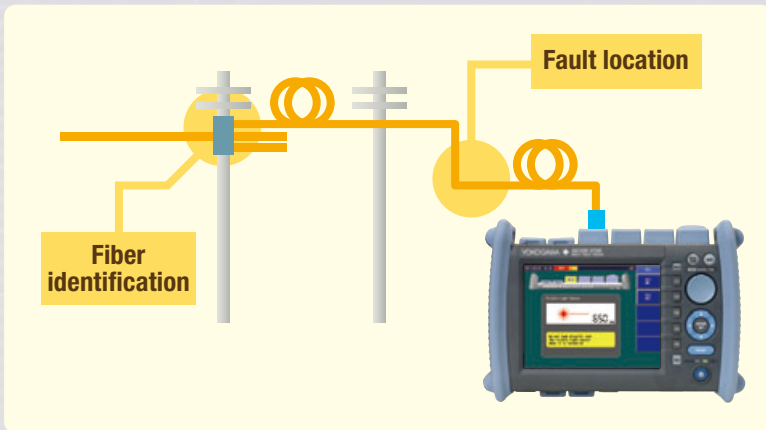

Visual fault location and Fiber identification


The visible light source enables to identify a single core out of multicore fiber and find a break point in a launch area visually. This feature works even when OTDR is in use, so that you can search for a next fiber to test, while OTDR is measuring one fiber.

*: /VLS option is required to use this function.



Visible light source screen

Fault Locator

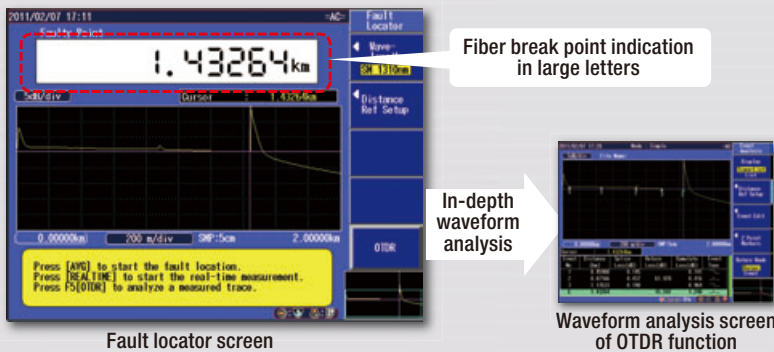

Fault locator screen


Waveform analysis screen of OTDR function

Find a fiber break point easily and rapidly

Pressing one button initiates a measurement and event search and then clearly indicates the location of a fiber break. Waveform analysis can be done by simply switching over to OTDR function.

Remote Control Software

Remote control from the PC using the same GUI

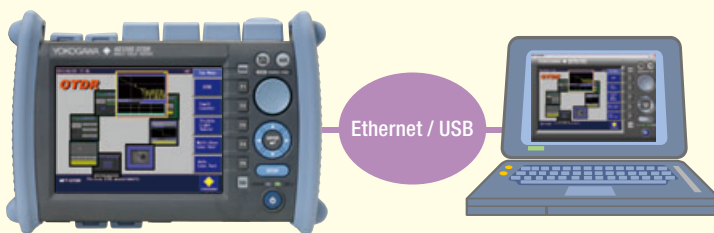

Remote Control using the same GUI

The AQ1200 can be remotely controlled from a personal computer (PC) through Ethernet* or USB interface. The remote control software displays a front panel image of AQ1200 on PC, so you can control the AQ1200 with mouse in the same manner as operating the actual instrument.

*: /LAN option is required to use this function.

Video Fiber Inspection Probe




Fiber Inspection Probe screen

Fiber end inspection

With a video fiber inspection probe connected to USB interface, the AQ1200 can show an image of the fiber end on the screen to visually inspect scratches and dirtiness. The video image can be saved in the internal memory or external USB storage media.

*: Recommended probe: CI 1100 B YOK (Lightel)

IP Test*



PING Test screen

IPv4 PING

For testing network connections by sending PING through the optional LAN interface, no need to bring a PC. Variable frame length and transmission intervals

*: /LAN option is required to use this function.

Data Analysis and Report Creation Tool

• AQ7932 OTDR Emulation Software (Sold Separately)

The AQ7932 is an application software that performs analysis of trace data measured by the AQ1200 MFT-OTDR and creates reports on a PC. The report creation wizard function makes this task simple. AQ1200 MFT-OTDR data can be easily loaded onto a PC using USB memory or storage function.

(The AQ1200 MFT-OTDR is supported from software version 4.1. Please make sure of the version information before use.)

■ Trace Analysis

You can edit event search conditions, approximate curve line secngs, and other analysis conditions, and repeat the analysis. Operation is also easy. Simply click the function icon.

■ Variety of Analysis Functions

Display up to eight traces on screen, and perform a variety of analyses including multi trace analysis and differential trace analysis for comparing recent waveforms with old ones, and use the 2 way trace analysis function for analyzing average values of data measured from both ends of optical fiber.

■ Creating Reports

You can compile traces and measured values of trace files and creates a report. Reports can be created easily by just following the step-by-step instructions in the report wizard and saved in Excel or CSV format.

• Functionality

Data format: .SOR (Bellcore), .SOR (Telcordia [AQ1200/AQ7275/AQ7270/AQ7260]), TRD(AQ7260), .TRB(AQ7250), .BMP(BMP), .CSV (Data CSV), .CSV (Event List CSV)

Report output: CSV file, XLS file, and print out


• PC requirements (Software and Hardware)

Software

OS: Microsoft Windows 2000, Microsoft Windows XP, Microsoft Windows Vista*
Excel: Microsoft Excel 2000 or later (when the XLS file output function is used)

Hardware

Clock speed: Environment in which the OS operates smoothly.
HD capacity: 20 MB or more space required at the time of installation
Memory capacity: 128 MB or more (256 MB or more recommended)
Display: Resolution of 1024 × 768 pixels or better
Disc drive: CD-ROM drive

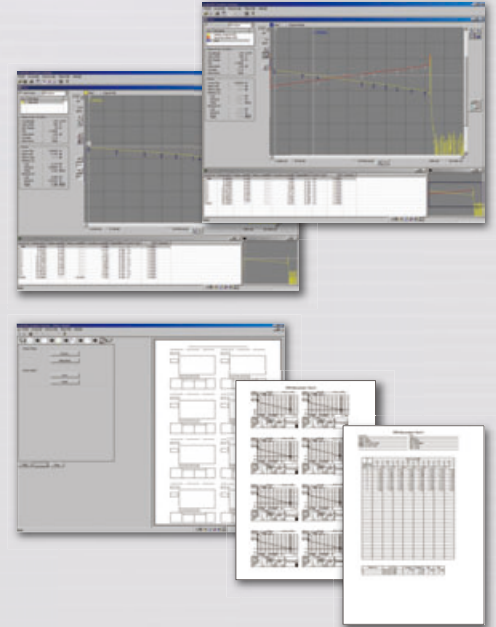

Microsoft Windows 2000, Windows XP, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the United States and other countries. The TM and ® symbols are not used to indicate registered trademarks and trademarks in this document.
(* Microsoft Windows Vista is to be supported in Ver3.03 and later.

Comon Specifications

Horizontal Axis Parameters

Sampling resolution	5 cm, 10 cm, 20 cm, 50 cm, 1 m, 2 m, 4 m, 8 m, 16 m, 32 m
Readout resolution	1 cm (Min.)
Number of sampled data	Up to 100,000 points
Group refractive index	1.30000 to 1.79999 (in 0.00001 steps)
Unit of distance	km, kf or miles
Distance measurement accuracy	$\pm 1 \text{ m} + \text{Measurement distance} \times 2 \times 10^{-5} \pm \text{sampling resolution}$

Vertical Axis Parameters

Vertical axis scale	0.2 dB/div, 0.5 dB/div, 1 dB/div, 2 dB/div, 5 dB/div, 7.5 dB/div
Readout resolution	0.001 dB (Min.)
Loss measurement accuracy	$\pm 0.05 \text{ dB/dB}$ (When the measuring loss is 1 dB or less, the accuracy is within $\pm 0.05 \text{ dB}$.)

OTDR Measurement Function

Distance measurement	Displays up to eight digits of the relative one way direction between two arbitrary points on the trace.
Loss measurement	Displays one way loss in steps of 0.001 dB to a maximum of 5 digits. Displays the one way loss, loss per unit length, and splice loss between any arbitrary points on the trace.
Return loss measurement	Measures return loss and total return loss of a fiber cable or between two arbitrary points on the trace.

OTDR Analysis Functions

Analysis functions	Section analysis
--------------------	------------------

Internal Memory

Memory capacity	1000 waveforms or more Can store measured waveforms and measurement conditions
-----------------	---

Display

Display	5.7 inch color TFT LCD
Total number of displayed pixels*	640 (horizontal) × 480 (vertical) pixels

* : The LCD may contain some pixels that are always ON or OFF (0.002% or fewer of all displayed pixels including RGB), but this is not indicative of a general malfunction.

External Interface

USB	USB1.1 Type A and Type B, one each Type A: For external memory, external printer, and fiber inspection probe Type B (mini): For connecting to an external PC for remote control or access to the OTDR's internal memory.
-----	--

File Formats

File formats	Read: SOR, SET (AQ7270/AQ7275/AQ1200) Write: SOR (Telcordia), SET, CSV, BMP, JPG, PNG
--------------	--

Specifications per Model

Model	AQ1200A	AQ1200B ^{*1}	AQ1200C ^{*1}
Wavelength	1310 ±20 nm ² , 1550 ±20 nm ² (typ.)	1625 ±10 nm	1650 ±5 nm ³ , 1650 ±10 nm ⁴
Applicable fiber	SM (ITU-T G.652)		
Distance range	0.5, 1, 2, 5, 10, 20, 50, 100, 200 km		
Pulse width	3 ns, 10 ns, 20 ns, 50 ns, 100 ns, 200 ns, 500 ns, 1 μs, 2 μs, 5 μs, 10 μs		
Dynamic range (typ.) ^{*5}	34/32 dB ^{*6}	33 dB ^{*7}	34 dB ^{*7}
Event dead zone (typ.) ^{*8}	0.75 m ⁹		
Aoenuation dead zone (typ.) ^{*10}	4 m / 5 m	7 m	
Optical power control	Normal / Low		

- *1 : Pulse light output power at 1625 nm and 1650 nm, +15 dBm or less, built-in 1310 & 1550 nm cut filter
 *2 : ±25 nm is guaranteed
 *3 : At a point -20 dB from the pulse light output peak value (measured after 30 minutes or more from power-on at an ambient temperature of 23°C)
 *4 : At a point -60 dB from the pulse light output peak value (measured after 30 minutes or more from power-on at an ambient temperature of 23°C)
 *5 : SNR:1, pulse width: 10 μs, measurement time: 3 minutes. When angled-PC connector are used, each dynamic range decreases by 0.5 dB.
 *6 : 32/30 dB is guaranteed
 *7 : 30dB is guaranteed
 *8 : Pulse width: 3 ns, return loss: 55 dB or more
 *9 : 0.8m is guaranteed
 *10 : Pulse width: 10 ns, return loss: 55 dB or more, at a point where the backscatter level is within ±0.5 dB of the normal value
 Note : Specifications are at 23°C ±2°C unless otherwise noted.

Specifications per Option

• Light source & Optical powermeter option

Optical Power meter	Power meter type	Standard (/SLT)	High Power (/HLT)	PON (/PPM)
	Wavelength setting		850/1300/1310/1490/1550/1625/1650 nm or 800 to 1700 nm (1 nm steps) or CWDM wavelength (1270 to 1610 nm, 20 nm step)	
Power range	CW	+10 to -70 dBm	+27 to -50 dBm ^{*3}	+10 to -70 dBm ^{*1} , +27 to -50 dBm ^{*2}
	CHOP	+7 to -60 dBm	+24 to -50 dBm ^{*3}	---
Noise level		0.5 nW (-63 dBm, 1310 nm)	50 nW (-43 dBm, 1310 nm)	0.5 nW (-63 dBm, 1310 nm), 50 nW (-43 dBm, 1550 nm)
Uncertainty under standard conditions ^{*4}		±5%		±0.5 dB
Readout resolution		0.01		
Level unit		Absolute: dBm, mW, μW, nW Relative: dB		
Modulation mode		CW, CHOP (270 Hz/1 kHz/2 kHz)		
Average function		1, 10, 50, and 100 times		
Light source	Wavelength (nm)	1310/1550 ±25 nm (AQ1200A), 1625 ±10 nm (AQ1200B), 1650 ±5 nm ^{*5} , 1650 ±10 nm ^{*6} (AQ1200C)		
	Optical output level (dBm)	-3±1		
	Level stability (dB) ^{*7}	±0.05 (AQ1200A), ±0.15 (AQ1200B, AQ1200C)		
	Modulation mode	CW, 270 Hz, 1 kHz, 2 kHz		
Applicable fiber	SM (ITU-T G.652)			
Memory and logging function	Measurement data storage: 10 to 1000 data, Logging interval: 0.5, 1, 2, 5, or 10 sec.			
Auto loss test function	Loss measurement with light source and optical powermeter interlock			---

- *1 : at 1310/1490 nm *2 : at 1550 nm *3 : 1300 to 1600 nm
 *4 : Power level: 100 μW(-10dBm); CW, Wavelength: 1310 ±20 nm (1550 nm ±10 nm for 1550 nm setting of /PPM), Spectral width: 10 nm or less (1310 nm), ambient temperature: 23 ±2°C, Optical fiber: SM (ITU-T G.652), Optical connector: FC/PC, Wavelength setting error: 0.5 nm or less, excluding aging (add 1% one year after calibration)
 *5 : At a point -20 dB from the pulse light output peak value (measured after 30 minutes or more from power-on, at ambient temperature of 23°C)
 *6 : At a point -60 dB from the pulse light output peak value (measured after 30 minutes or more from power-on, at ambient temperature of 23°C)
 *7 : Constant temperature within 23°C ±2°C ; CW (15 min.)

• Visible light source (VLS) option

Optical connector	2.5 mm ferrule type
Center wavelength	650 nm ±20 nm
Optical output level	-3 dBm or more (peak)
Modulation mode	CHOP Approx. 2 Hz
Laser class	3R



• Ethernet interface option

Interface	10BASE T / 100BASE TX
Functions	PING test, PC remote control

General Specifications

Item	Specification	
Environmental conditions	Storage temperature	-20 to 60°C
	Operating temperature	0 to 45°C (0 to 40°C when AC adapter is being used); (0 to 35°C when battery is being charged)
	Humidity	20 to 85% RH (no condensation)
Power requirements	100 to 240 VAC, 50/60 Hz	
Battery pack	Run time: 6 hours ^{*1} , Recharge time: 5 hours ^{*2}	
Dimensions	217.5 (W) × 157 (H) × 74 (D) mm, excluding projections	
Mass	Approx. 1 kg, including battery pack	
Compliant standards	Laser safety	Class 1 M (IEC 60825-1) ^{*3} , 21CFR1040.10 ^{*4}
	Safety	EN61010-1
	Emissions	EN61326-1 class A, EN55011 class A, group 1
	Immunity	EN61326-1 Table 2 (for industrial locations)

- *1 : In case measurement is performed for 30 seconds every 3 minutes, with no options installed, in power save mode (LCD brightness: Power save, Screen saving: ON).
 *2 : at temperature of 23°C, power OFF



IEC 60825-1

*4 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No.50 dated June 24, 2007
 Toshiba I&E No.2-E-43 Sataecho Techno-4th, Tokyo, 190-8588 Jpn
 21CFR1040.10

MULTI FIELD TESTER MFT-OTDR **AQ1200**

Model and suffix code

Models	Suffix code	Descriptions
AQ1200A		1310/1550 nm
AQ1200B		1625 nm
AQ1200C		1650 nm
Language	-HJ	Japanese/English
	-HE	English
	-HC	Chinese/English
	-HK	Korean/English
	-HR	Russian/English
Power cord	-M	Complied with PSE
	-D	UL/CSA standard
	-F	VDE standard
	-R	AS standard
	-Q	BS, Singapore standard
	-H	GB standard, Complied with CCC
	-P	EK standard (S. Korea)
-T	BSMI standard	
Optical connector	-USC	SC type
	-UFC	FC type
	-ASC	SC/Angled-PC type
Light source & optical power meter	/SLT	Stabilized light source & Standard optical power meter
	/HLT	Stabilized light source & High power optical power meter
	/PPM	Light source & PON Power meter
Visible light source	/VLS	Optical connector: 2.5φ ferrule
PON measurement*	/PN	PON measurement mode
Ethernet	/LAN	10BASE T/100BASE TX (PING test, Remote control)
Shoulder belt	/SB	Shoulder belt

* : Only for AQ1200A, AQ1200B and AQ1200C come equipped this function.
The mode is optimized for PON measurement.

Accessories (optional)


Model	Suffix code	Descriptions
SU2006A		Soft carrying case
735480 (For optical powermeters)	-SCC	Connector adapter (SC)
	-FCC	Connector adapter (FC)
735481 (For optical powermeters)	-LMC	Ferrule adapter (φ1.25)*
	-SFC	Ferrule adapter (φ2.5)*
SU2005A (For OTDR, LS and PON Power meter)	-SCC	Universal adapter (SC)
	-FCC	Universal adapter (FC)
739871	-M	Complied with PSE
	-D	UL/CSA standard
	-F	VDE standard
	-R	AS standard
	-Q	BS, Singapore standard
	-H	GB standard, Complied with CCC
	-P	EK standard (S. Korea)
-T	BSMI standard	
739882		Battery pack (Spare)
B8070CY		Shoulder belt

* : The ferrule adapter has no mechanism to lock the connected fiber.
Please be cautious of the connection, especially when emitting high power light.

Application Software

Model	Suffix code	Descriptions
735070	-EN	AQ7932 OTDR Emulation Software (Ver4.1 or later) Display English

Dimensions

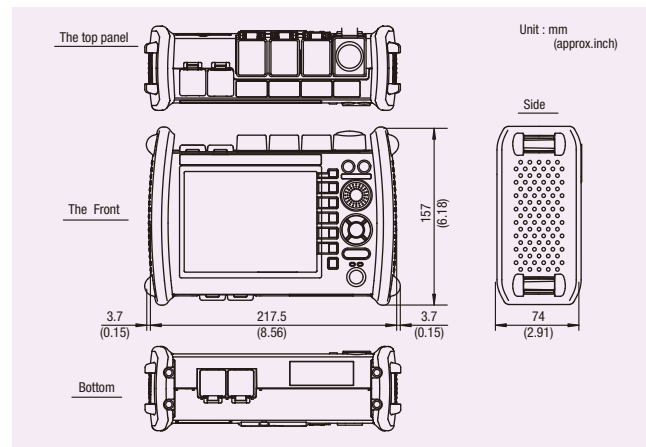

Related Products

OTDR

AQ7275

Superior OTDR for Core, Metro, and Access networks



- Wide Range of Modules Available (9 models)
- World-class Short Dead Zone (0.8 m)
- High Dynamic Range (45 dB)
- Multi-core fiber measurement function to increase work efficiency

OLTS

AQ1100 MFT-OLTS

Light Source + Optical Power Meter



Light Sources (3 models)

SM1310/1550 nm SM1310/1550/1625 nm
MM850/1300 nm and SM1310/1550 nm

Optical Power Meter Selections

Standard : +10 to -70 dBm
High power : +27 to -50 dBm
PON : 1490/1550 nm
Parallel measurement (split)

Optical Power Meter

AQ2160-01

Simplified functions bring superior cost performance



- Easy 3-key operation
- LCD with Backlight

AQ2160-02

Powerful tools with high performance and durability



- Wavelength: 750 to 1700 nm
- Data storage for test results (up to 1100 data)

LD Source

AQ4270-01

Small and light weight 2-wavelength light source (1310/1550 nm)



- High output level stability
- Detachable universal adapter for easy cleaning.

Yokogawa's Approach to Preserving the Global Environment

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guidelines and Product Design Assessment Criteria.

NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.

YOKOGAWA

YOKOGAWA METERS & INSTRUMENTS CORPORATION

Global Sales Dept. /Phone: +81-42-534-1413 Facsimile: +81-42-534-1426

E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA

YOKOGAWA EUROPE B.V.

YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (1)-770-253-7000, Fax: (1)-770-254-0928

Phone: (31)-88-4641000, Fax: (31)-88-4641111

Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 01/b] Copyright ©2011

Printed in Japan, 102(KP)