

4 Way High Power Broadband Combiner SMA Connectors From 20 MHz to 1,000 MHz Rated at 200 Watts

MPP0201K0200-4 is a 4 way High Power Broadband RF Combiner with a max input power at 200 watts operating from 20 to 1000 MHz with 50 ohm SMA connectors. The MPP0201K0200-4 has greater than 12 dB typical isolation, less than 0.75 dB typical low insertion loss and a MAX VSWR of 1.30:1; along with a phase balance of ± 5 degrees and an amplitude balance of ± 0.25 dB. The RF Combiner operates in a temperature range from -55°C to $+85^{\circ}\text{C}$, with a foot print of 4"x3"x1.12".

Configuration

Input Connectors	SMA Female
Output Connector	SMA Female
Frequency Range	20 to 1,000 MHz
Design	Reactive
Number of Input Ports	4
Housing Material and Plating	Aluminum Alloy

Electrical Specifications*

Description	Min	Typ	Max	Units
Frequency Range	20		1,000	MHz
Impedance		50		Ohms
Insertion Loss			0.75	dB
Input Power			200	Watts
Input VSWR			1.3:1	
Isolation	12			dB
Phase Balance		± 5		Degrees
Flatness		± 0.25		dB

* Values at 25°C, sea level

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Range	20-125	125-1,000				MHz
Min Isolation	12	15				dB

Mechanical Specifications

Temperature

Operating Range -55 to +85 deg C

Size

Length 4 in [101.6 mm]
 Width 3 in [76.2 mm]
 Height 1.12 in [28.45 mm]

Connectors

Description	Input Connector	Output Connector
Connector Material	Passivated Stainless Steel	Passivated Stainless Steel



Features:

- 20 to 1000 MHz Frequency
- 200 watt max power
- Insertion Loss: < 0.75 dB
- Phase Balance: ± 5 degrees
- Amplitude Balance: ± 0.25 dB
- Isolation: >15 dB
- High Power Handling Capability

Applications:

- Communications Systems
- Power Combining
- PCS,GSM,LTE, Cellular
- UMTS
- Amplifier Systems
- Amplifier Power Combining
- Wireless Infrastructures
- Defence Applications

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com



Compliance Certifications (visit www.FairviewMicrowave.com for current document)
 RoHS Compliant Yes



Plotted and Other Data



Notes:


- Values at 25 °C, sea level

Typical Performance Data

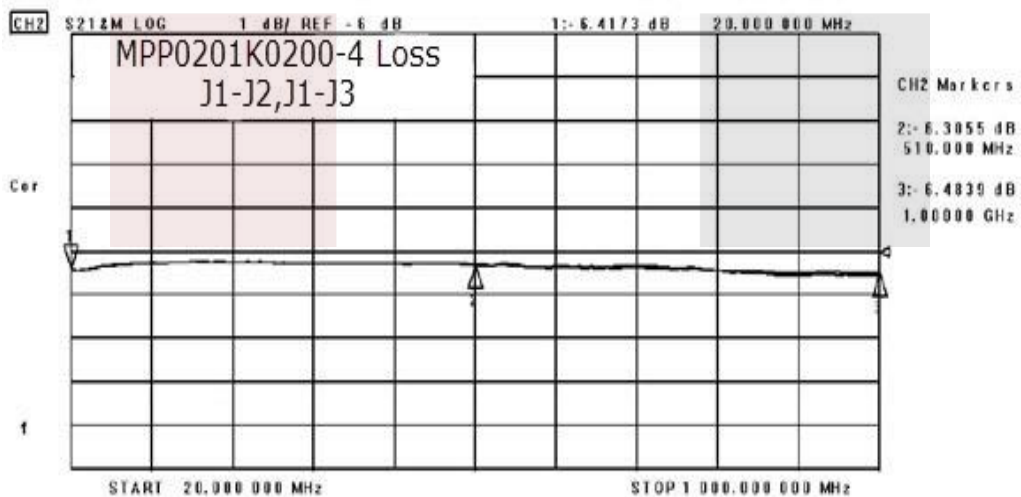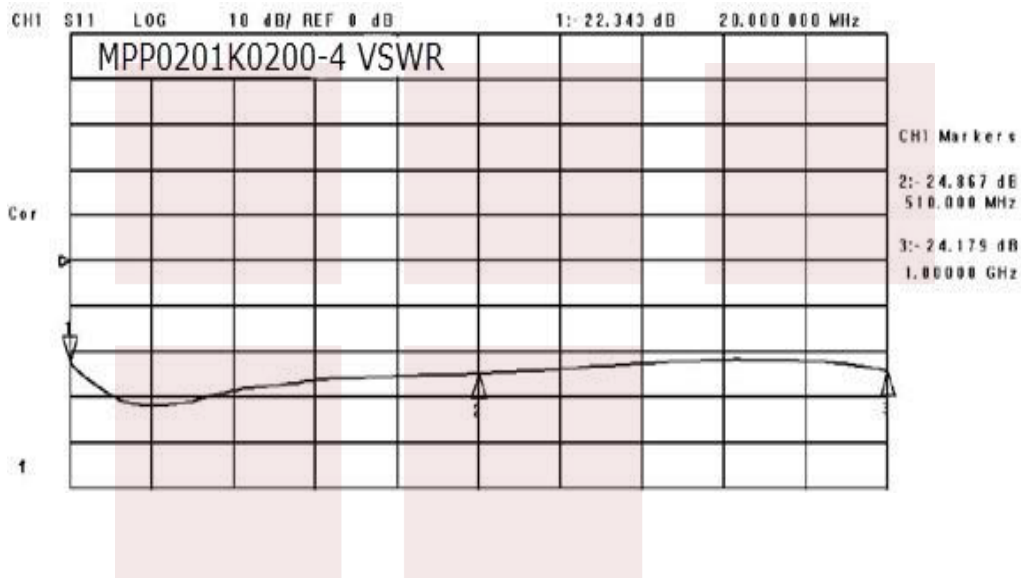

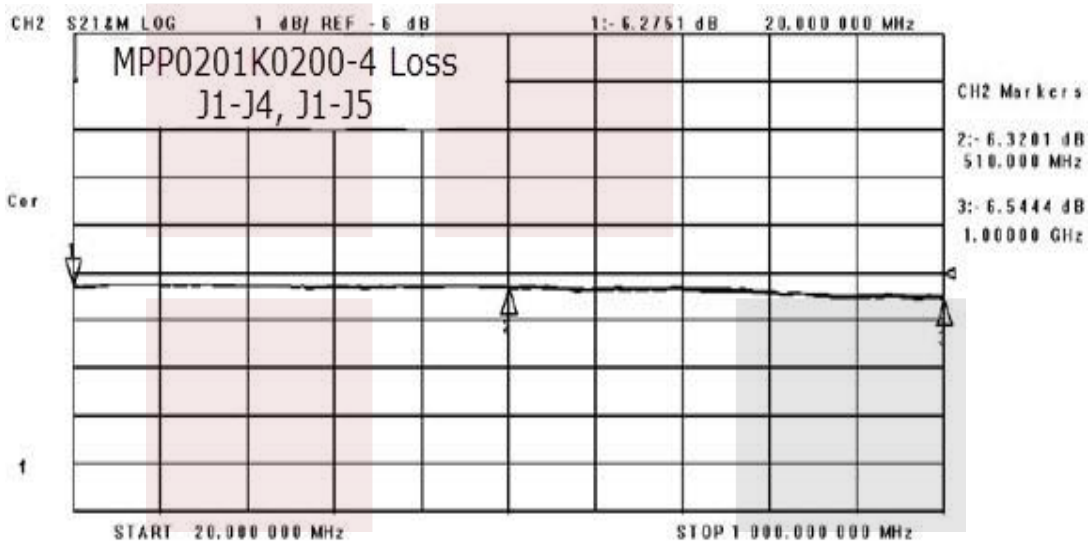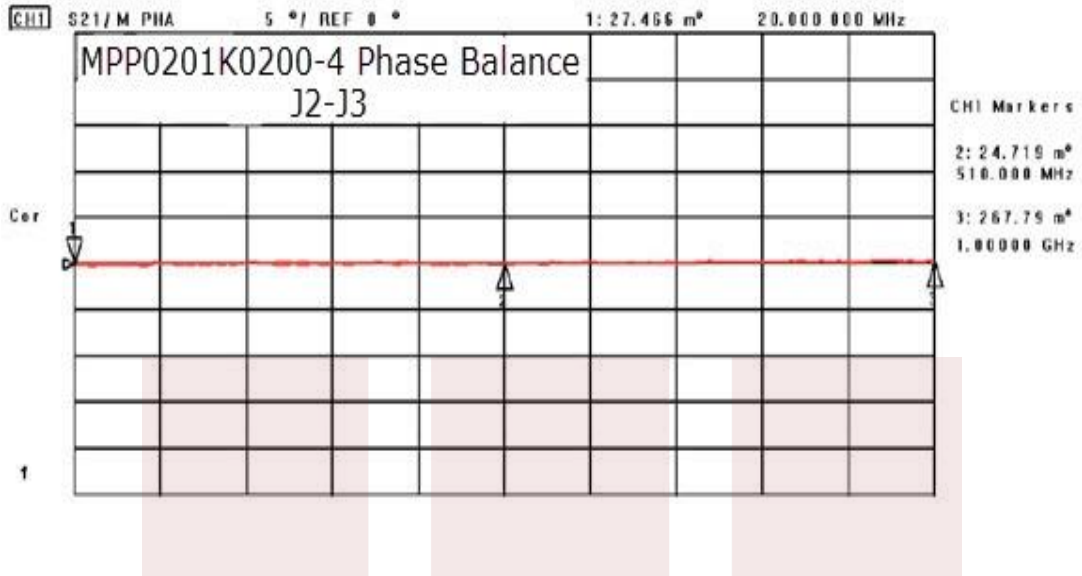

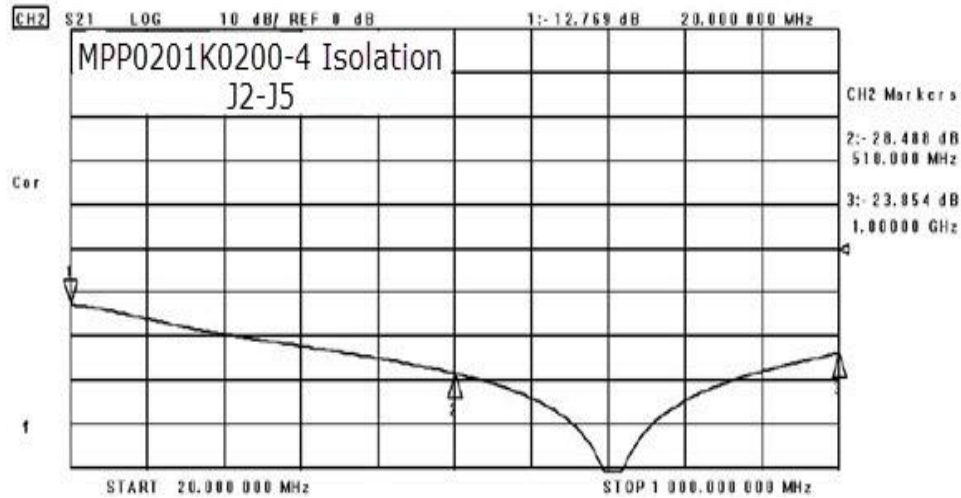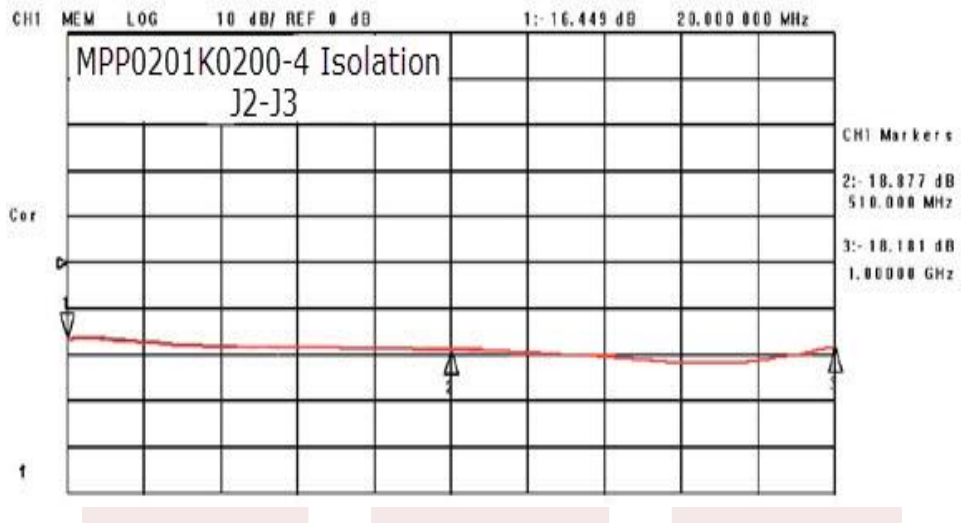

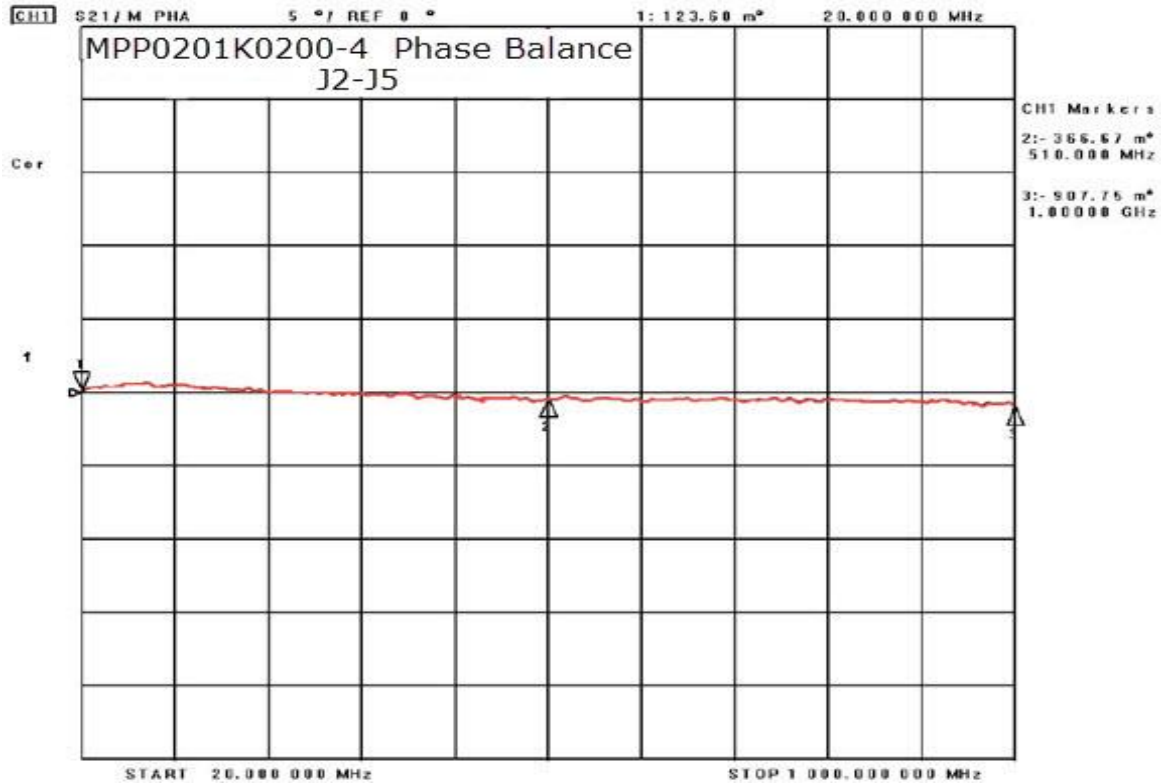


4 Way High Power Broadband Combiner SMA Connectors From 20 MHz to 1,000 MHz Rated at 200 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [4 Way High Power Broadband Combiner SMA Connectors From 20 MHz to 1,000 MHz Rated at 200 Watts MPP0201K0200-4](http://www.fairviewmicrowave.com/4-way-power-combiner-sma-broadband-1000-mhz-200-watts-mpp0201k0200-4)

URL: <http://www.fairviewmicrowave.com/4-way-power-combiner-sma-broadband-1000-mhz-200-watts-mpp0201k0200-4-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

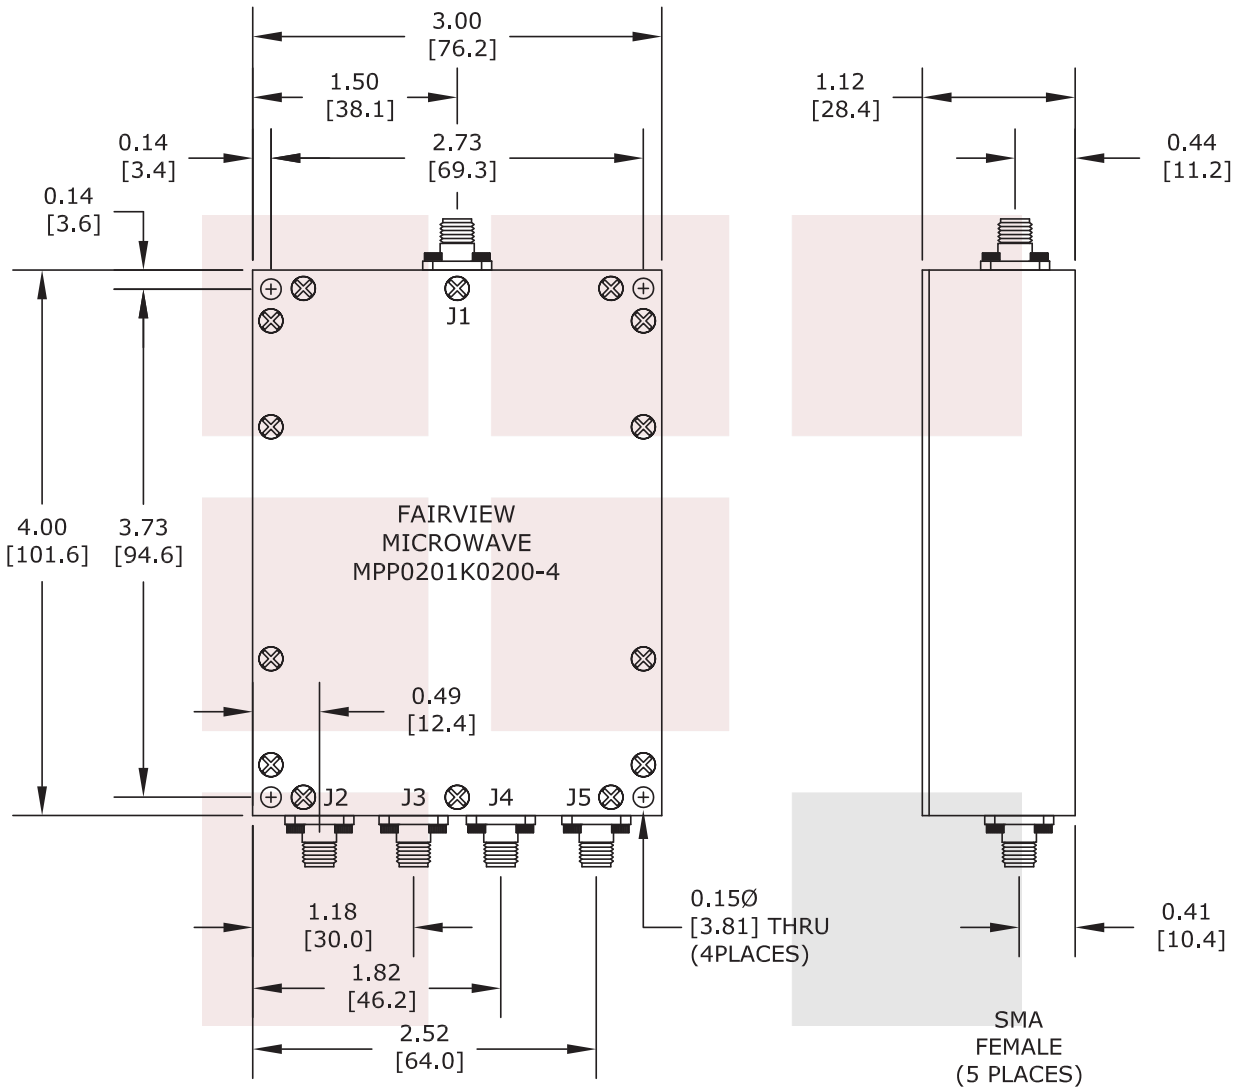

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 4 Way High Power Broadband Combiner SMA Connectors From 20 MHz to 1,000 MHz Rated at 200 Watts		DWG NO MPP0201K0200-4		CAGE CODE 3FKR5	
CAD FILE	090814	SHEET	SCALE	N/A	SIZE A 2233