



SMA Male to 1.85mm Female Adapter

SMA male to 1.85mm female adapter part number SM3952 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to 1.85mm adapter has a male to female gender configuration. SM3952 SMA male to 1.85mm female adapter operates to 27 GHz. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The 1.85mm connector mates mechanically with commercially available 2.4mm connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Min	Тур	Max	Units
DC		27	GHz
		1.2:1	
		71	DC 27

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length		0.83 in [21.08 mm]		
Weight		0.01102 lbs [5 g]		
Description	Connector 1	Connector 2		
Туре	SMA Male	1.85mm Female		
Polarity	Standard	Standard		
Mating Cycles	500	500		
Mating Torque	8 to 10 in-lbs			
	[0.90 to 1.13 Nm]			



Configuration:

- SMA Male Connector 1
- 1.85mm Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 27 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2			
Туре	SMA Male	1.85mm Female			
Contact Material	Beryllium Copper	Beryllium Copper			
Contact Plating	Gold over Nickel	Gold over Nickel			
Contact Plating Spec.	MIL-G-45204	MIL-G-45204			
Insulation Material	PTFE	Oxide-Noryl			
Outer Contact Material		Passivated Stainless Steel			
Outer Conductor Contact Spec	Ç.	ASTM A380			
Body Material	Passivated Stainless Steel	Passivated Stainless Steel			
Body Plating Spec.	ASTM A380				
Coupling Nut Material	Passivated Stainless Steel				
Coupling Nut Plating Spec.	ASTM A380				

Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD-202, Method 204, Condition D (20 G's) MIL-STD-202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

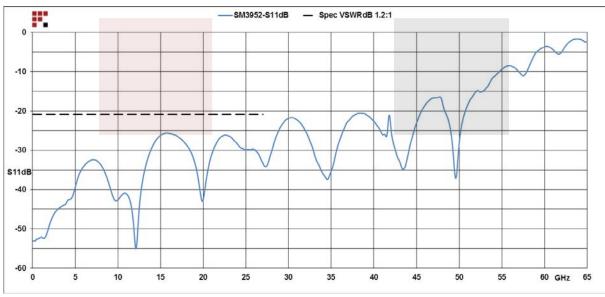





SMA Male to 1.85mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: SMA Male to 1.85mm Female Adapter SM3952

URL: https://www.fairviewmicrowave.com/sma-male-1.85mm-female-adapter-sm3952-p.aspx







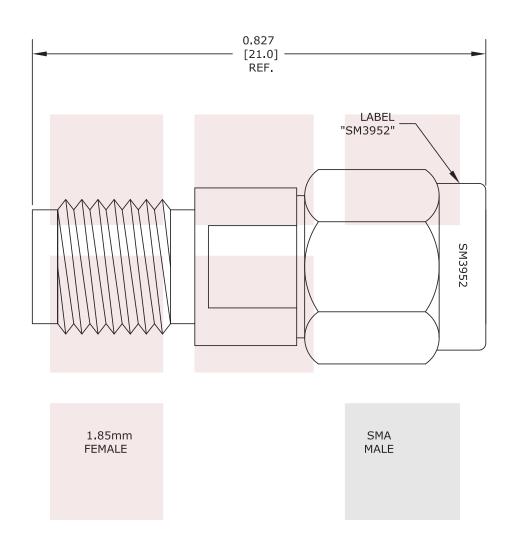

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
SMA Male to 1.85mm Female Adapter	DWG NO SM3952		CAGE CODE 3FKR5		
	CAD FILE 091416	SHEET	SCAL	E N/A	SIZE A