

Inner DC Block From 10 MHz to 4 GHz With BNC Connectors

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	0.01		4	GHz
Impedance		50		Ohms
VSWR			1.35:1	
Insertion Loss		0.5		dB
Operating Voltage (DC)			200	Volts



Mechanical Specifications

Size

Length	1.6 in [40.64 mm]
Width	0.57 in [14.48 mm]
Weight	0.0544 lbs [24.68 g]

Configuration

Design	Inner DC Block
Package Type	Connectorized

Description	Connector 1	Connector 2
Type	BNC Male	BNC Female
Connector Specification	MIL-C-39012	MIL-C-39012
Inner Cond Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Outer Cond Material & Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material & Plating	Brass, Nickel	
Body Material & Plating		Brass, Nickel

Environmental Specifications

Temperature

Operating Range	-65 to +125 deg C
-----------------	-------------------

Compliance Certifications (visit www.FairviewMicrowave.com for current document)


RoHS Compliant	Yes
REACH Compliant	12/17/2014

Plotted and Other Data

Notes:

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

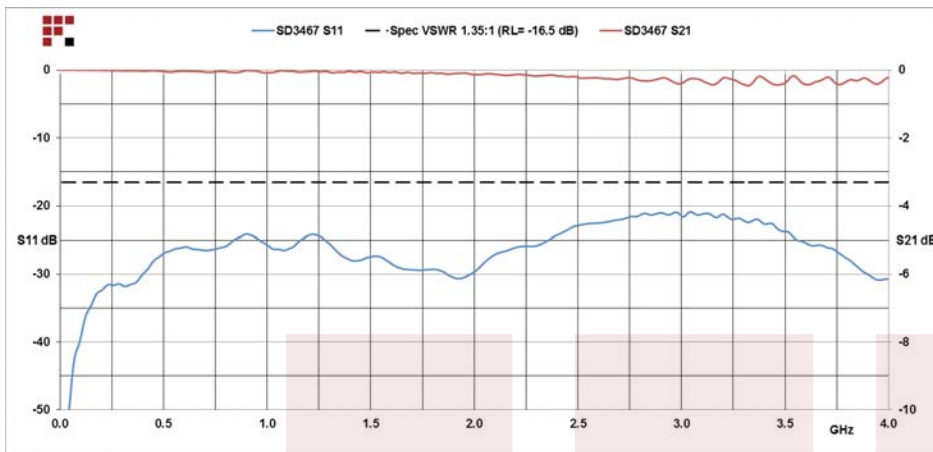


Inner DC Block From 10 MHz to 4 GHz With BNC Connectors from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Inner DC Block From 10 MHz to 4 GHz With BNC Connectors SD3467](https://www.fairviewmicrowave.com/inner-dc-block-10-mhz-4-ghz-bnc-connectors-sd3467-p.aspx)

URL: <https://www.fairviewmicrowave.com/inner-dc-block-10-mhz-4-ghz-bnc-connectors-sd3467-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

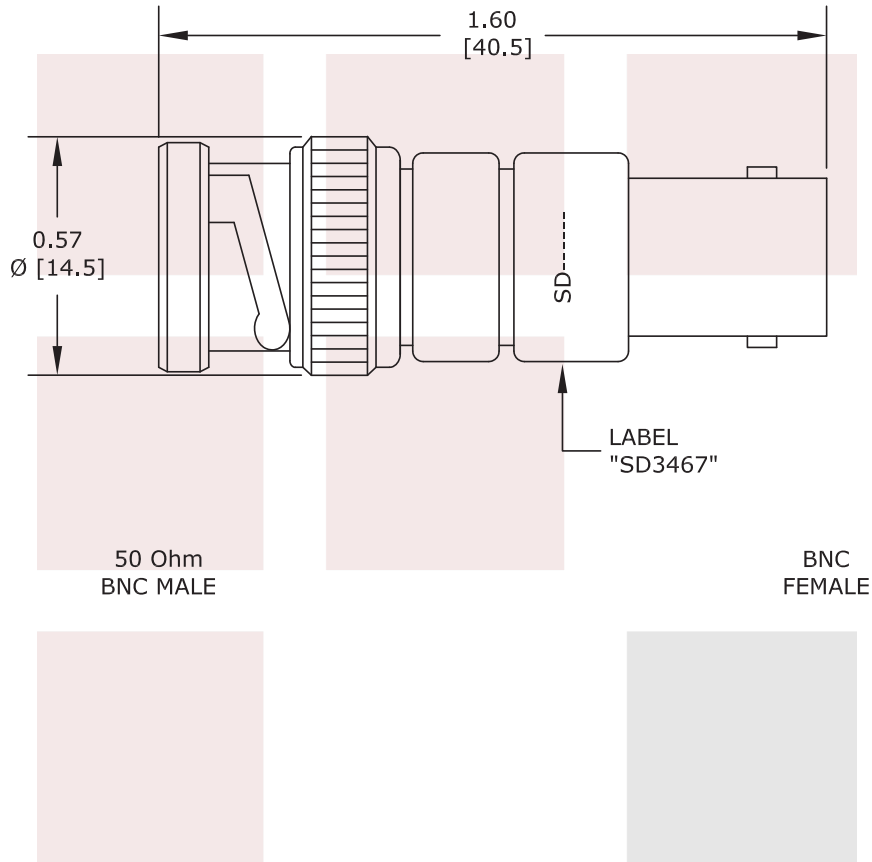

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Inner DC Block From 10 MHz to 4 GHz With BNC Connectors		DWG NO SD3467		CAGE CODE 3FKR5	
CAD FILE	070716	SHEET	SCALE	N/A	SIZE A 2233