



**SHINING 3D®**



# OptimScan-3M / 5M

High End Industry Inspection



## OptimScan-3M

SHINING3D OptimScan-3M 3D scanner is the standard 3D scanner released by SHINING3D. Equipped with 3.0 mega pixels cameras and latest blue light scanning technology, it has wide application due to its excellent performance.

## OptimScan-5M

SHINING3D OptimScan-5M 3D scanner is the latest blue light 3D scanner in the market, featuring high-end outlook, structure, component and configuration. Its 5.0 mega pixel cameras and blue light scanning technology bring users amazing scanning speed and accuracy, suitable for high-end application like defense, aerospace, mould industry, etc.



# OptimScan-3M/5M

## High End Industry Inspection

### Values of CAV Full Dimension Inspection



#### Minimize the Error Difference and Save the Time to the Utmost

This solution avoids manual error by carrying out CAD data inspection directly, which improves the inspection process efficiency.



#### Dramatic Production Efficiency Improvement :

Professional inspection software could record all the steps and parameters. Batch inspection is as easy as single case inspection, because software could repeat the inspection procedure automatically. User can simply press one key to do one case or multi-case inspection job.






#### Smart Inspection :

User can modify any step of the inspection process and the software shall update all related steps automatically. User has the right to modify till getting the best inspection result.



#### High Accuracy :

Repeatability is an important part of quality control process. Shining 3D full dimension inspection solution could help user realize this repeatability easily. Its automation also minimizes the error difference from user to user.

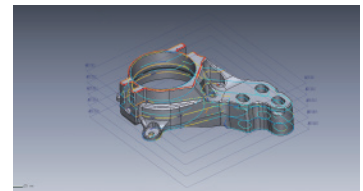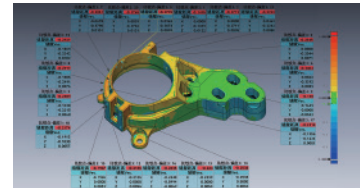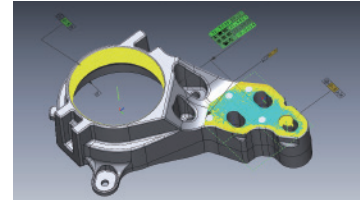

### 3D Probe

- Compatible with OptimScan-3M/5M
- Easily measuring the positions that non-contacted scanning is inaccessible, such as very deep holes
- Optical CMM measurement technology
- Wireless bluetooth transmission
- Light and portable design



### Specification

Model	OptimScan-3M	OptimScan-5M
Single Shot Accuracy	0.007-0.025 mm	0.005-0.015 mm
Volume Accuracy	0.1 mm/m	0.08 mm/m
Single Scan Speed	< 2 s	< 1.5 s
Point Distance	0.048-0.192 mm	0.04-0.16 mm
Single Scan Range	100×75 mm / 200×150 mm / 400×300 mm	100×75 mm / 200×150 mm / 400×300 mm
Scan Depth	100-400 mm	100-400 mm
Camera Resolution	3.0 MP×2	5.0 MP×2
Light Source	Blue light ( LED )	Blue light ( LED )
Scan Type	Non-contact structure light scanning	
Alignment	Reference points auto-alignment / manual alignment	
Output Data Format	ASC, STL, PLY, RGE, P3, PF	
PC Configuration Requirement	CPU: Intel core i7 3770 or better Display card: NVIDIA GeForce GT 670 or better Memory: 8G DDR3 1600 or better	
OS System Support	win10 64bit	
Operation Temperature	0-45 °C	

\* Notice: SHINING 3D reserves the right to explain any alteration of the specification and pictures.