



Crimping Tool For Non-Insulated Terminals

TP-22 Capacity IEC/DIN:6/10/16/24mm² AWG:10/8/6/4 JIS:5.5/8/14/22mm² JIS



For E-Type Sleeve Terminals

TP-R



JIS C 9711
JQ0314008



Electrical resistance Vibration fatigue

Not deformed

*Temporary holding function is not loaded on TP-2

Front

Back




Safety strap holes

Soft texture elastomer grip reduces fatigue of Continuous crimping works.

[illegible]

Specifications

- Material | Alloy steel
- Head hardness [HRC] | 42～46
- Handle part hardness [HRC] | 46～49
- Handle cover | Elastomeric molded resin grips

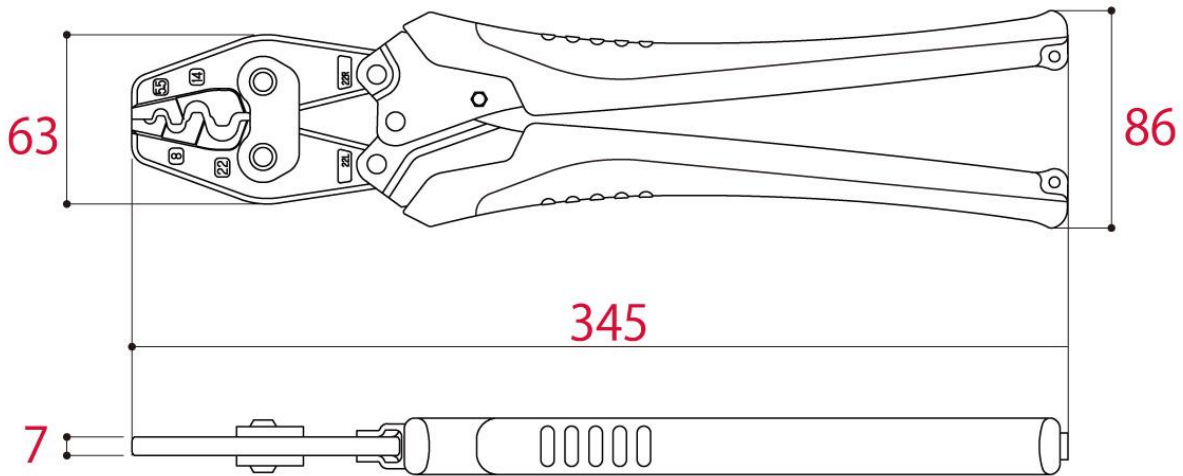

	Size[mm]				Weight [g]	EAN-code (4952269)
	Overall length	Head width	Head thickness	Handle width		
TP-22	345	63	7	86	760	114263

Terminal Size			
JIS standard mm ²	IEC • DIN standard mm ²	American Wire Gauge	Crimped Mark
5.5	6	10	5
8	10	8	8
14	16	6	14
22	24	4	22