



COOLSHOT 20 GII Laser Rangefinder




Key Features

- Compact, lightweight (approx. 130g) body
- Measurement range: 5-730m/6-800yd.
- First Target Priority algorithm for displaying the distance to the closest subject when measuring overlapping subjects
- Single or continuous measurement (up to 8 seconds). If single measurement fails, it automatically extends the measurement until succeeding for up to 4 seconds. Keeping the power button depressed enables continuous measurement for up to approx. 8 seconds.
- High-quality 6x monocular with multilayer coating for bright, clear images

- Long eye relief design affords eyeglass wearers easy viewing
- Dioptre adjustment function
- Rainproof — JIS/IEC protection class 4 (IPX4) equivalent
- Wide temperature tolerance: -10°C to +50°C/14°F to 122°F

Internal display

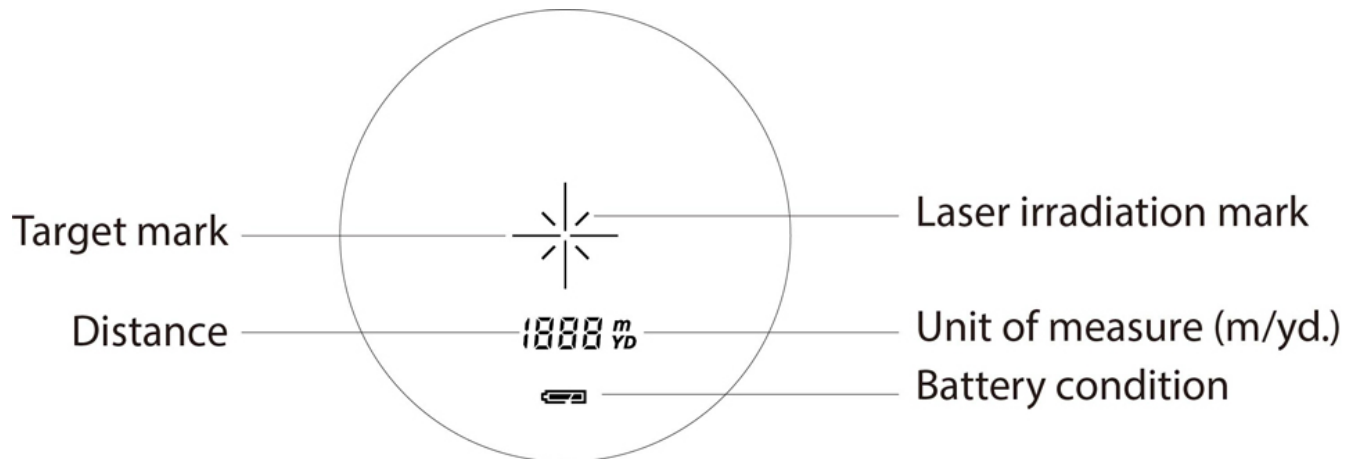

Specifications

COOLSHOT 20 GII		
Measurement range (actual distance)		5-730m/6-800 yd.
Distance display (Increment)		Every 1m/yd.
Accuracy* (actual distance)		±1m/yd. (shorter than 100m/yd.) ±2m/yd. (100m/yd. and over)
Finder	Magnification (x)	6
	Effective objective diameter (mm)	20
	Actual field of view (°)	6
	Exit pupil (mm)	3.3
	Eye relief (mm)	16.7
Dimensions (LxHxW) (mm/inch)		91 x 73 x 37/3.6 x 2.9 x 1.5
Weight (excluding battery) (g/oz.)		130/4.6

COOLSHOT 20 GII	
Power source	CR2 lithium battery x 1 (DC 3V) Automatic power shut-off (after approx. 8 sec. unoperated)
Waterproof structure	Rainproof — JIS/IEC protection class 4 (IPX4) equivalent (under Nikon's testing conditions)
Laser classification	IEC60825-1: Class 1M/Laser Product FDA/21 CFR Part 1040.10: Class I Laser Product
Electromagnetic compatibility	FCC Part15 SubPartB class B, EU:EMC directive, AS/NZS, VCCI classB, CU TR 020, ICES-003
Environment	RoHS, WEEE

- *Under Nikon's measurement conditions.

The specifications of the product may not be achieved depending on the target object's shape, surface texture and nature, and/or weather conditions.